



[www.truelite.us](http://www.truelite.us)

# ALBINA

SERIES-DC LED STREET LIGHT

60W

## Features


Truelite ALBINA series-DC LED streetlight luminaires are designed to replace conventional fixtures. Its compact design allows increased mounting versatility and ease of installation. The long lived LED luminaires are designed to meet the most demanding specification criteria while offering maximum energy savings, reduced maintenance costs, and a superior quality of light. Our led street light offer improved night time visibility, safety through better color rendering, more uniform lighting distributions and the elimination of many dark areas between poles. It also works with intelligent street light system. The design adheres to relevant safety and street lighting standards and the technology has attractive energy-saving capacity of up to 70% against traditional fixtures.

- Wide input voltage range
- More than 70% energy savings, long life and high reliability
- Robust housing to stand harsh environments
- Die casting aluminum alloy body, electrostatic spray treatment withstand high temperature and acid, alkali resistance
- Integrated with LED module with independent control, easy maintenance
- Compatible to work with solar and wind energy for more energy saving
- Low electromagnetic emission
- Easy to mount & focus
- High Luminous Efficiency
- IP 67 rating
- Instant start , no flickering and long switching life
- CE, RoHS Certifications

## Product Specification


<b>Electrical Data</b>	
Operating Voltage	9-18V/18-32VDC
No of LED's	36
Driver Power Efficiency	>90%
Rated power	59.7W
Power Factor(PF)	>0.95
Total Harmonic Distortion	< 20%
Drive Current	530mA
Dimming	Optional
<b>Light Data</b>	
Color Temperature	3000K/4000K/5000K/5700K
Color Rendering Index	>70
Beam Angle	10°,25°,40°,60°,90°,120°,150°.
Efficiency of led	153.5 lm/W
Luminous flux	9242lm
Led chip	LUMILEDS LUXEON 5050
Service Life	>50000 Hours
<b>Environmental Data</b>	
Working Ambient Temperature	-40° to +50°
IP Grade	IP 67
Relative Humidity(RH)	10%-95%
Cooling	Conventional
Certificate	UL/ CUL /DLC/ LM79 / ENEC /CB/CE/ ERP/ RoHS /PSE /IK08
<b>Mechanical Data</b>	
Product finish	Gray/Black/Bronze/White
Light Fixture Material	Aluminum
Dimension	523 x 345 x 116(mm) 20.59" X 13.58" X 4.57"
Weight	6.58kg (14.51lbs)
Luminaire Fixing	Pole mounted
*All parameters are measured @ ambient temperature Tc 25 degree	

## Fixture

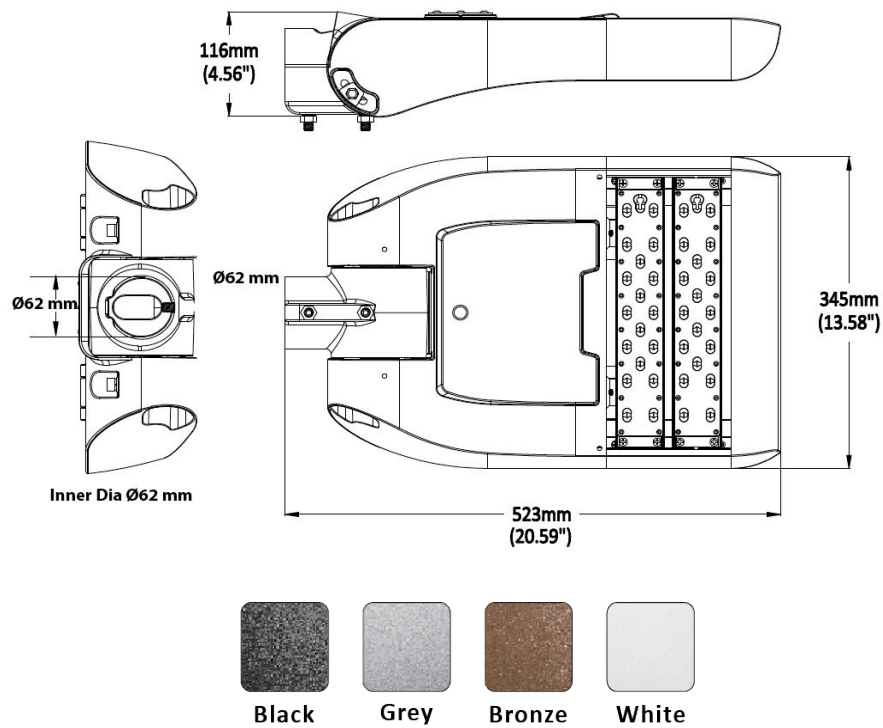

Unit: mm

## Isolux Diagram

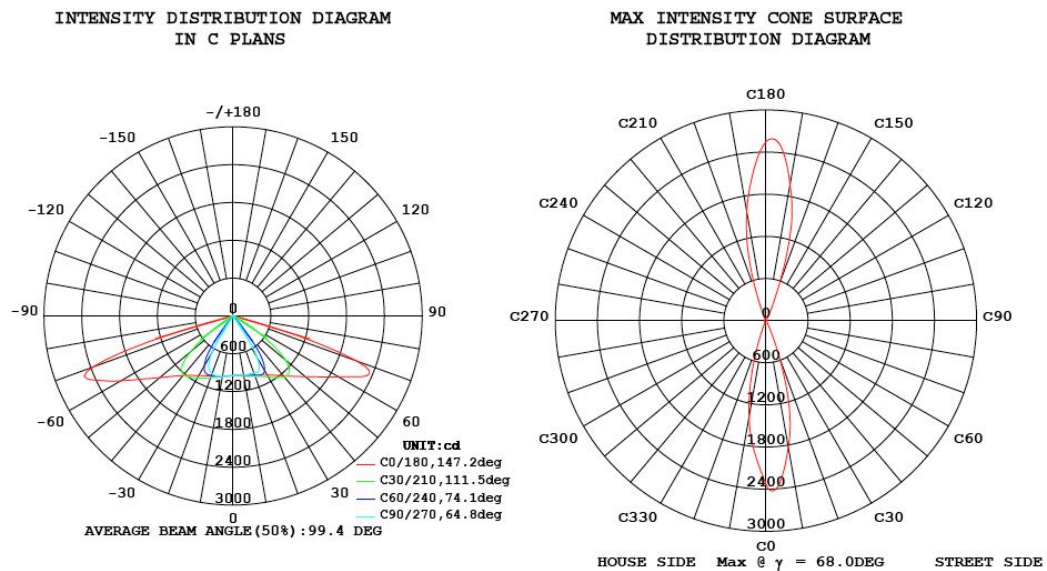

## Application Area

Outdoor lighting plays a crucial role in the safety and security of our streets and public places. Today outdoor lighting has to be smarter to comply with new legislation, environmental challenges and requirements to reduce energy usage. This is where the latest outdoor, roadway and street lighting solutions from Truelite come into play. It is an Ideal for application at city branch, residential streets, courtyard, etc.

## Ordering Code

Product Series	MODEL	OPTICAL LENS	CCT	OPTIONAL COLOR	LIGHTING CONTROL	ACCESSORY INFO
ALBINA Series-DC	TLSLD60	T1M	30K	GR***	00	Adaptor Bracket
		Type I Medium	3045	Grey	Not required	
		T2M	±175K	(RAL:7004)		
		Type II Medium				Bird Spike
		T3M	40K***	BK		
		Type III Medium	3985	Black	01	
		T3L	±275K	(RAL:9011)	Photocell	3/5/7-pin NEMA Receptacle
		Type III Long				
		T4S	50K***	BZ		
		Type IV Short	5028±283K	Bronze		
		T5U		(RAL:8014)		
		Average Beam angle 10°	57K		02*	
		T5V	5665	WH	Moon Sensor	
		Average Beam angle 25°	±355K	White		20KA Surge Protection Device
		T5W		(RAL:9010)		
		Average Beam angle 40°			03*	
		T5S			Photocell	
		Average Beam angle 60°			+	
		T5M			Moon Sensor	Backlight Control
		Average Beam angle 90°				
		T5L			04*	
		Average Beam angle 120°			DALI	
		T5X				
		Average Beam angle 150°			05**	Safety Cable
		T5D			1-10V dimming	
		Diffuser				

### Example:

TLSLD60-T1M50K-GR00, TLSLD60-T1M80K-GR02, TLSLD60-T1M50K-GR05